




- Legs half-cut diameter 220
- Girder 433 x 160 laminated wood beam in GL32c quality
- Assemble legs-girder in accordance with Assembly Principle 35
- Mount swing suspension in accordance with Assembly Principle 36
- Shock absorption Assembly Principle 47
- Foundation and marking Assembly Principle 19.
- Concrete required: 4.5 m3 (should be supplied with concrete gun)
- Height of fall: 1.6 m

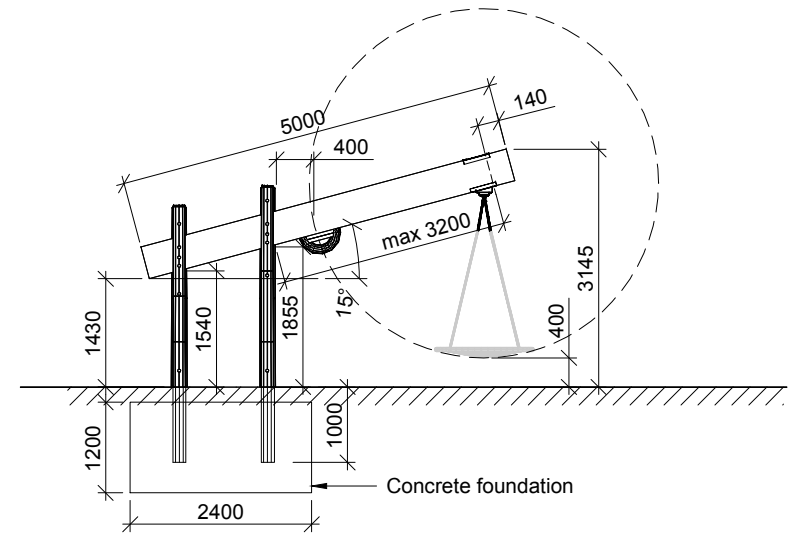

Side view

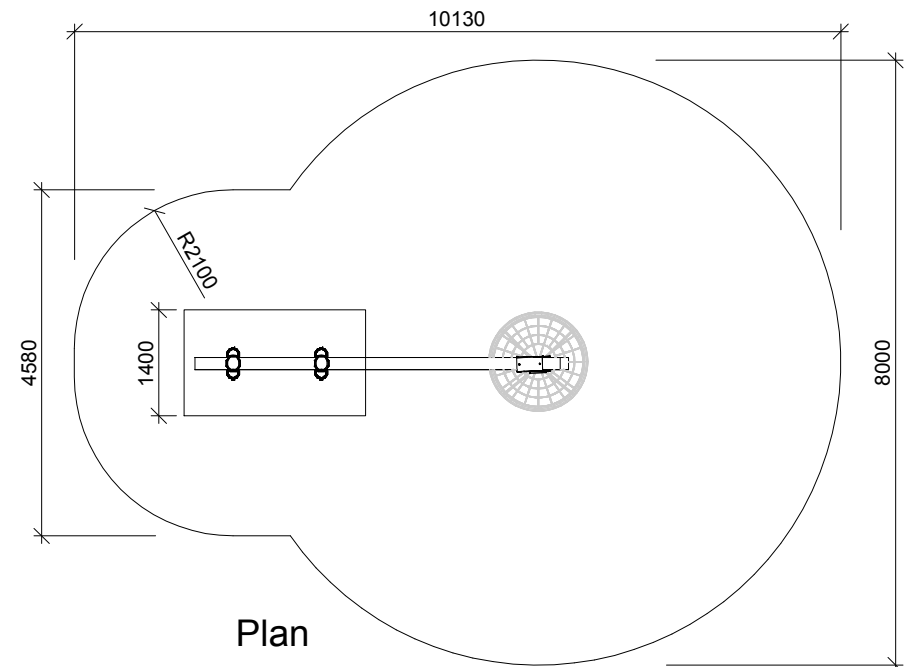

Plan

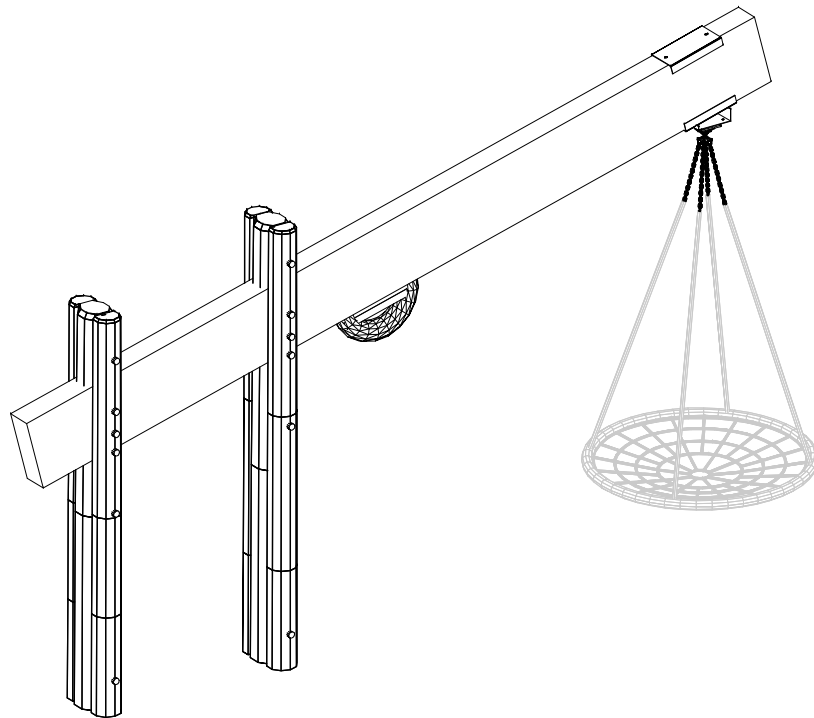

Perspective