

Mounting instructions for „Multifunctional trainer“

Item-No. 55 1010 402



Diagram 1: Overall view of the fitness equipment

Mounting instructions for „Multifunctional trainer“

Item-No. 55 1010 402

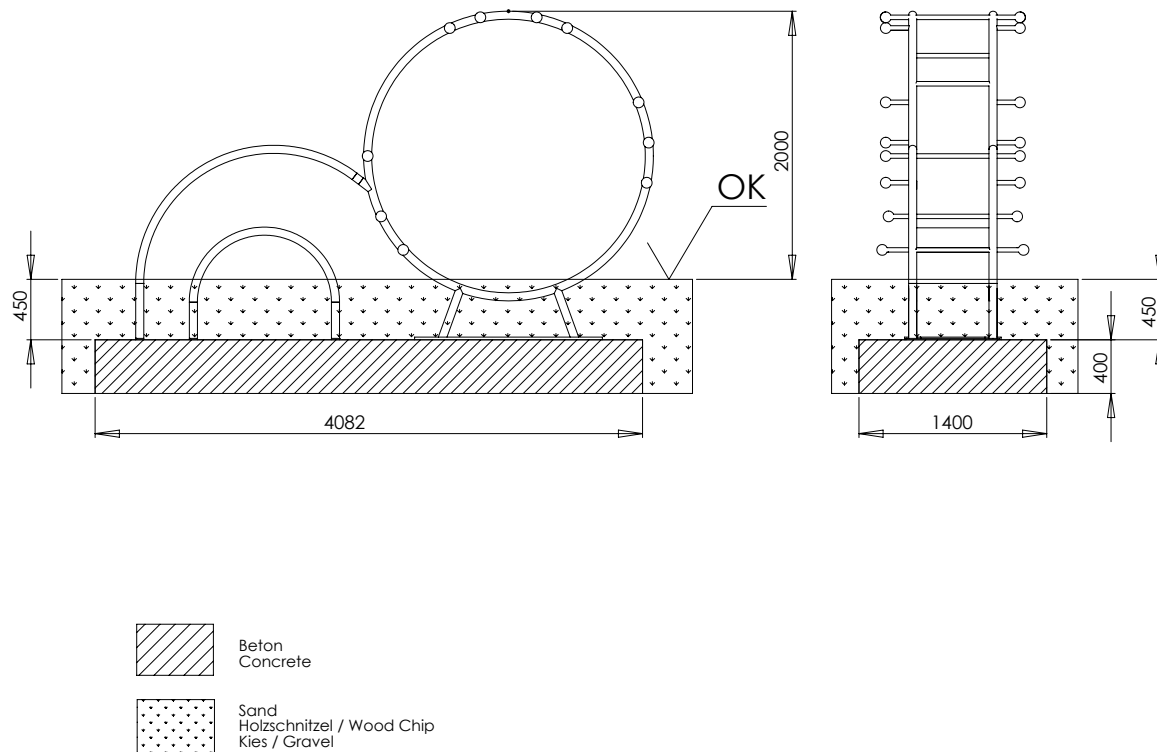


Diagram 2: Side view with dimension details
„Multi-functional trainer“

1. Select the fitness equipment location in consideration of the required safety area (see diagramm 3: 7350 x 4660 mm).
2. Carry out excavation work for the foundation anchor as shown in Diagram 2 (LxWxH 4082 x 1400 x 400 mm). After excavation, compress the foundation floor.
Note: The fitness equipment is built in on the ground level. Pay attention to items marked „ground level“ of the fitness equipment!
3. Set up the concrete foundations acc. to the dimensions indicated (LxBxH 4080 x 1400 x 400 mm) with central, horizontal reinforcement (BST 500 S) in the quality class C 20/25.

Reinforcement plan: Concrete foundation with reinforcement

Main foundation: BSt 500S

Ever 4 stirrups Ø 8 mm lengthwise and cross

Concrete cover $h' = 3$ cm

Concrete quality class B25

4. Select the position of the fitness information sign.

Attention: Because of the risk of injury, the instruction sheet has to be arranged outside of the minimum zone of the „Multi-functional trainer“.

Mounting instructions for „Multifunctional trainer“

Item-No. 55 1010 402

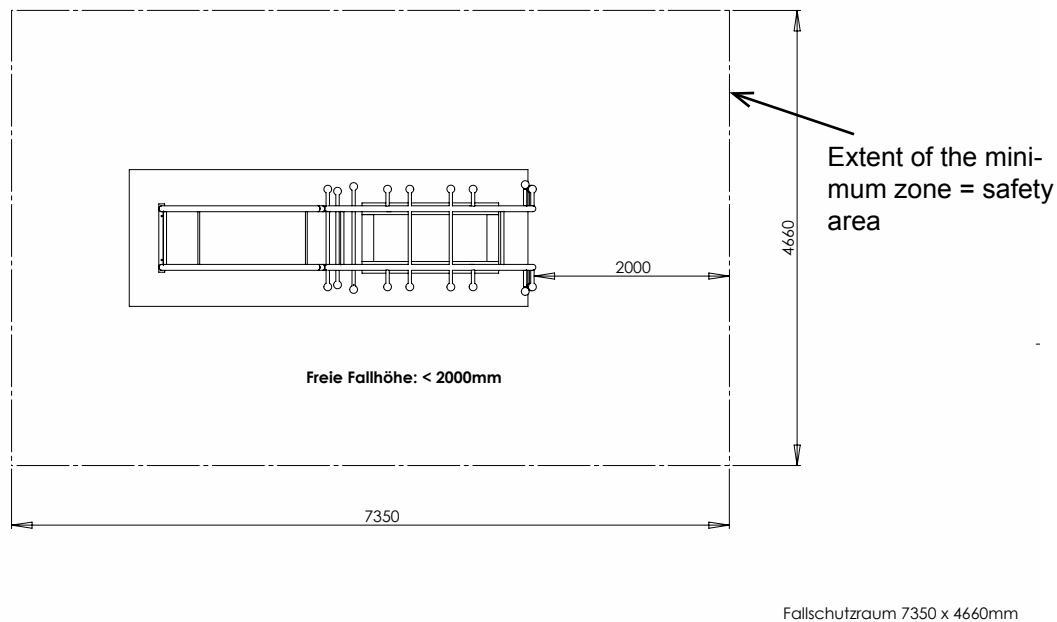


Diagram 3: Top view „Multi-functional trainer“

5. Carry out excavation work for the instruction sign for the two foundations as shown in Diagram 4. After excavation, compress the foundation floor.
6. Set up the concrete foundations acc. to the dimensions indicated (LxBxH 300 x 300 x 300 mm) in the quality class C 20/25.
7. After the setting period of 10 -14 days - depending on weather conditions and foundation size - clean the surface of the foundation, place the big element of and the equipment.
Note: Do not screw the base plates onto the foundations yet!
8. Connect the two bows at the intended locations acc. to the Diagram 1.
9. Adjust the sports equipment and screw the base plate of the fitness equipment onto the foundation anchor with the included heavy-duty dowels.
10. Place the little bow in accordance with diagram 1 in the center and screw it onto the foundation anchor with the included heavy-duty dowels.
11. Place the instruction sheet as well onto the foundation and anchor with the included heavy-duty dowels.
NOTE: We suggest to align the instruction sheet with the result that the instructions are visible during the use of the fitness equipment.
12. Fill up the existing gaps between the foundation and foundation hole with excavated soil and compact and built an even ground level.

Mounting instructions for „Multifunctional trainer“

Item-No. 55 1010 402

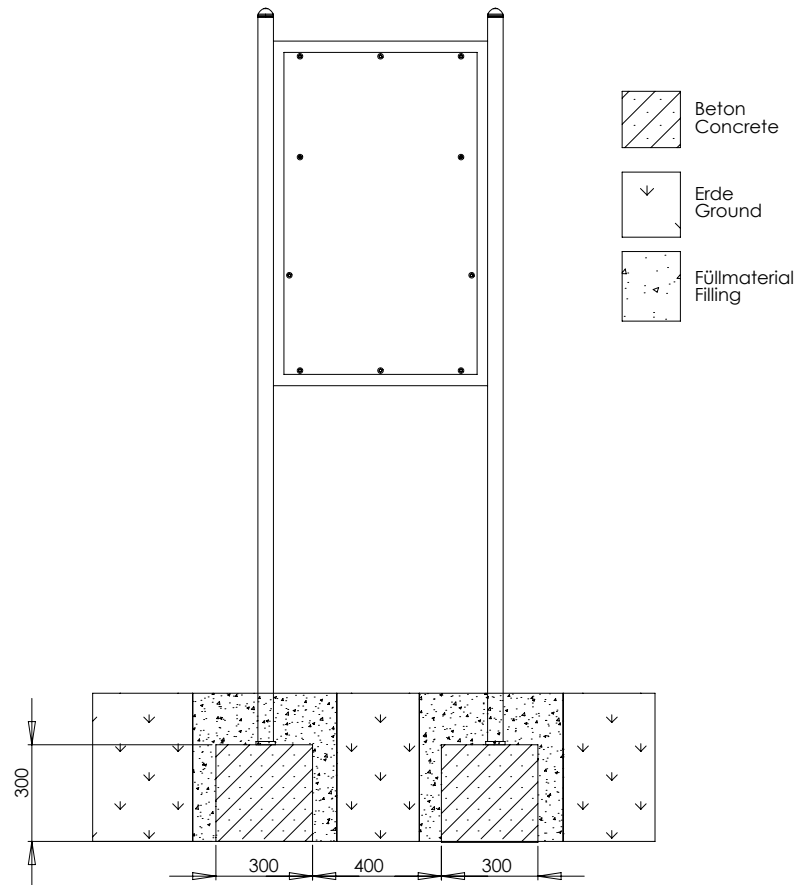


Diagram 4: foundation plan of the instruction sheet

13. Seal the foundation with the safety cover required for the height of fall indicated.

Critical drop height: about <2000 mm

Recommended surface material: sand, gravel, wood chips, synth. fall protection.

14. Do not allow to use the equipment before the installation has been finished.

Attention: If the fitness equipment has been incompletely installed or partly dismantled when carrying out maintenance and repair work, this may lead to particular risks of injury for the user. For this reason, make clearly visible that the equipment shall not be used in such cases.

NOTE: Fitness equipment, which contain components made of stainless steel should not come with „normal“ steel parts in contact. Those steel parts may rub off and leave small steel particles in combination with moisture brown rust stains. If such corrosion occur on stainless steel parts, they are fine with an abrasive (240 grit) to remove.

Please take care when transporting and setting up the fact that the components are made of stainless steel with no „normal“ steel parts in contact.

Mounting instructions for „Multifunctional trainer“

Item-No. 55 1010 402

In order to preserve a good visual appearance of your stilum playground equipment over a long period one should take care of maintenance of the stainless surface even despite of their corrosion resistance.

Especially areas, which can not be reached by rainfall should be frequently cleaned from dirt and deposits due to air pollution and dirt caused by the atmosphere. Light soiling can easily be removed by using a high pressure cleaner.

For persistent deposits use a clean cloth moistened with a special liquid cleaner (e.g. on phosphoric acid) and rinse off with clear water after a short application time. During cleaning with mild abrasive components, only wipe over stainless steel surface in polishing direction.

For heavily soiled surfaces, polishes can be used (e.g. for cleaning chrome on cars) or for greasy and oily dirt alcoholic cleaning agents and solvents (e.g. ethyl alcohol, isopropyl alcohol or acetone).

However, it should be noted that the dissolved soiling is not spread over the surface again.

Do not use any chlorid or hydrochloric containing cleaning products nor scouring powder, bleaching - or silver polish cleaner. Cleaning intervals depend on type and degree of soiling as well as on demands made on optical characteristics.

Therefore cleaning is advisable at intervals of six to twelve months – whereby in the case of strong soiling it is appropriate to clean the playground equipment at intervals of 3 to six months.

General Information DIN 16630:2015-06 4.1:

DIN EN1176 specifies that fitness equipment should not be installed in the immediate vicinity of children's playground equipment. In cases where they are erected in playgrounds or similar establishments near children's playground equipment, they must be separated by adequate distance, fencing or other structural means from the general play zone.

Movement area DIN 16630:2015-06 4.3.14.4

The free space allowed as movement area must be a minimum of 2.2m. The movement area must be clear of fences, and observers should not wait in this space. The space should be free of all objects that the user could fall on and be injured. E.g. injuries could be caused by posts that are not flush with adjacent parts or by protruding footings. In cases where the equipment has a forced movement, the free area must be extended about 0.5m. Where fitness units are installed on or adjacent to a wall which is at least as high as the exercise space, the movement area may be reduced. Movement areas of adjacent equipment may overlap except for equipment with forced movement.